# STP9100 HAND-PORTABLE





The STP9100 hand-portable combines extreme ruggedness with powerful audio and RF. Waterproof, submersible, dust-proof and marine-hardened, the IP67-rated STP9100 provides the latest smart technology to users who need a high specification, reliable radio, but prefer a more streamlined user interface.



Going further in critical communications



# STP9100 is a rugged TETRA HAND-PORTABLE

#### **EMERGENCY OPERATION**

Easy to activate and with a "Wake-On-Alarm" feature, the emergency key enhances user safety.

# NAVI-KNOB™ OPERATION

In combination with the mode key, provides simple and quick access to talkgroups, volume adjustments, user profile selection and status messaging.

# **RFID TAG**

Facilitates access control solutions, tracking of pool radios and potential for integration with back-end systems.

## LARGE TACTILE PRESS-TO-TALK KEY

Large and glove-friendly, located on the side of the radio.

# MAN-DOWN PERSONAL SAFETY

Multi-dimensional motion sensing technology is used to automatically provide man-down detection and reporting.

#### **PRODUCT DESIGN**

The STP9000 leverages the tough technology developed for Sepura's STP8X Intrinsically-Safe series to deliver a market-leading IP67 package, proven to perform in the most demanding operational environments.

## SMA ANTENNA CONNECTOR

Delivers 1.8 watts of RF power in TMO, DMO and Repeater Modes. Increases range, thus extending network and direct mode coverage.

Robustness – The STP9100 boasts an IP67 submersible, waterproof and dust proof environmental protection rating, which means that it will still function after having been submerged in up to 1m of water for up to 30 minutes. In addition, new Connector Protector technology provides marine-hardened protection against the corrosive damage that salt water and salt fog can cause to exposed connectors.

Improved ease of use – The STP9100 provides an enhanced user interface, which offers three different presentation styles, which users can select according to their personal preference.

- Compatibility mode allows existing Sepura users to be immediately familiar with the STP9100.
- Grid and List modes will appear familiar to new users who may be accustomed to user interfaces on smartphones or other GSM devices, rather than a radio.

These new presentation styles mean lower training costs for both new and existing Sepura users.

**Smart keypad and display technology** – Following detailed user feedback, Sepura has added "Haptic" technology to the STP9100. Haptics produce a physical movement of the radio, felt through the hand, which confirms to gloved users that the key press has been successful. In addition, the "Twist and Zoom" feature uses smartphone technology to allow a portrait image to be zoomed to full-screen size, allowing the user to see full detail of an image, such as a missing person, as they rotate the radio. The feature also enables access to details concerning the image.

Resource and information management – Tracking radios, particularly in a pooled system, can be difficult, so the STP9100's built-in RFID tag will be of considerable benefit to many users. In addition, the micro SD card slot makes it easy to store and manage data, such as photos, maps, missing person information and hazardous chemical data.

# HAND-PORTABLE

# 9000 SERIES

# LARGE, SUNLIGHT-VISIBLE, **COLOUR DISPLAY**

Featuring an enhanced user interface, which offers three presentation styles to suit user preferences

## **ERGONOMIC KEYPAD**

Large, well-spaced keys, enhanced by haptic technology, which allows the user to feel a key press, even through thick gloves.

# **POWERFUL AUDIO**

Large loudspeaker delivers outstanding audio, even in the noisiest environments.

# STPROTECT MODULE

An option which enables use of Sepura's STProtect indoor location and lone worker solution.


# **BOTTOM CONNECTOR**

Featuring Connector Protector™ technology to provide protection from corrosive salt water and salt fog.

- > Robust, 'tough technology' inherited from state-of-the-art development for the STP8X ATEX/IECEX
- > Market-leading IP67 (submersible, waterproof and dustproof) rating
- > High power RF and audio, with improved full-duplex audio experience
- > Intuitive, enhanced UI, with 3 presentation styles (Grid, List and Compatibility modes)
- > Integral RFID tag allows rapid asset tracking of pool-issued radios
- > Fully integrated Bluetooth<sup>™</sup> option
- > Enhanced key tactility through haptic-based technology

- > Automatic Man-Down reporting option
- > Wake-On-Alarm activation
- > Micro-SD memory card slot
- > End-to-End encryption option
- > DMO Repeater ready (frequency efficient Type 1A option) with Call Participation
- > A wide range of market-leading accessories
- > Supported by Sepura's market-leading software tools, including Radio Manager 2

Focussed on offering new functional possibilities and removing obstacles to efficient and effective operation, the STP9100 offers a range of benefits that make it more Reliable, Robust and Secure.

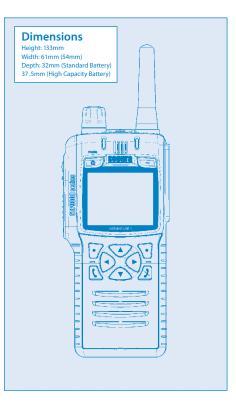

Enhanced user safety - In addition to Man Down, enhanced GPS and STProtect capability, the Wake-On-Alarm feature, which enables the STP9100 to be switched on and make an emergency call by pressing the emergency button, also helps to protect users.

Reduced cost of ownership – The STP9100 is compatible not only with all audio accessories from Sepura's STP8000 hand-portable range, but also with its market leading RadioManager2 Fleet Management tool and CMC encryption management suite - all factors which help organisations to maximise the value of existing investments.

Indoor location capability - An STProtect module can be optionally fitted within the radio. This is a key element of the STProtect complete indoor location and lone-worker protection solution. It allows organisations such as prisons, airports and industrial sites to track and protect lone workers, locate employees, control access to restricted areas and ensure that pre-defined security patrol routes are being adhered to.

Truly innovative, designed for critical communication users who want the very best TFTRA radios





# STP**9100** HAND-PORTABLE

#### DIMENSIONS

Height: 133mm Width: 61mm (54mm) Depth: 32mm (Standard Battery) Depth: 37.5mm (High Capacity Battery)

#### WEIGHT

With Standard Battery: 250g With High Capacity Battery: 275g

#### FREQUENCY BANDS

380-430MHz - STP9138 407-473MHz - STP9140

#### POWER SUPPLY

7.4V (nominal) lithium polymer battery packs Intelligent reporting batteries 1160mAh standard battery 1400mAh mid-capacity battery 1880mAh high-capacity battery

#### **RF PERFORMANCE**

RF Power - MS power class 3L (1.8 Watts) RF Power – customisable for: TMO/DMO/Repeater Adaptive Power Control supported Receiver class – A and B Receiver Static Sensitivity - 112dBm (-115dBm typical) Receiver Dynamic Sensitivity - 103dBm (-106dBm typical) PRODUCT PERFORMANCE

# Audio Power - >1 Watt

Operational temperature (Conformance tested) -20°C to +60°C Operational temperature (Min/Max) -30°C to +70°C<sup>4</sup> Storage temperature -40°C to +85°C<sup>1</sup> Dust & water protection IP67 (waterproof, submersible and dustproof) Shock, drop & vibration ETS 300 019 Salt fog: MIL810E 509.4(I); duration 24hr salt<sup>5</sup> Salt water: submersion, rated at 1m depth for 30 minutes⁵

#### **RFID PERFORMANCE:**

Internal tag – HITAG S2048, short range, 125KHz, ISO11784 and ISO11785 compliant Range: 1cm from back of individual radio box pack User accessible storage - 512 bits, Passive technology pre programmed (user can overwrite) 32 bit unique identifier Serial number Hardware code TEI

#### **PRODUCT OPTIONS**

GPS Bluetooth<sup>6</sup> Man-down alarm<sup>3</sup> DMO repeater type1A Air interface encryption options End-to-End encryption options Wide range of languages supported STProtect – in-building tracking solution<sup>6</sup> Smart card support

#### DISPLAY AND USER INTERFACE

Large 30x38mm active LCD area Hi-resolution display (176 x 220 pixels) Transflective TFT display, 262K colours, Normal, Large & Very Large mode text 5 configurable feature activation keys Vibrate call/message 2 Context keys Call history Phonebook (2000 entries) 9900 talkgroups in TMO/DMO 5000 multi-level talkgroup folders Intelligent search facility Quick groups Transmit inhibit with on/off status messaging Fixed & definable scan lists Remaining charge-time indication Missed call indicator Intuitively-enhanced user interface Choice of three user interface presentation styles (Compatibility mode, Grid mode and List mode) Haptic technology to enhance key tactility when used with heavy gloves Twist and zoom portrait image viewer Wake-on-alarm feature VOICE SERVICES

Full duplex calls (to MS and PABX/PSTN) Half duplex calls (Individual and Group) Priority call Emergency call (pre-emptive priority) Intelligent alarm reporting Talking party identity Calling line identity presentation MSISDN dialing DTMF dialling from address book<sup>8</sup> Dynamic group number assignment Background (hidden) groups DMO individual call<sup>8</sup> DMO group call DMO emergency call DMO intelligent emergency call Independent volume control Enhanced full duplex ear sealing Ambiance listening Privacy mode Whisper mode Group focus DATA SERVICES AND APPLICATIONS

Status messaging (in TMO & DMO) SDS Messaging (in TMO & DMO)<sup>7</sup> Concatenated SDS messaging<sup>7</sup> Multi-slot packet data Circuit mode data TETRA pager and call out Short Data Applications (SDAs) Image & map storage on memory card Lone-Worker feature Missed event application

#### LOCATION BASED SERVICES

GPS integrated option -192dBw (-162dBm) tracking sensitivity Over-The-Air GPS reporting using the following protocols • ETSI location standard reporting (LIP) NMEA & Sepura compact messaging GPS-based compass Enhanced indoor start-up and acquire through 'predicted ephemeris Bluetooth Location System compliant STProtect option-indoor tracking solution RFID tag equipped

#### SECURITY SERVICES

Authentication Class 1, 2, 3 and 3G security Air interface encryption TEA1/2/3/4 Supported<sup>2</sup> Smartcard E2E encryption support<sup>2</sup> Embedded E2E encryption support<sup>2</sup> In-country E2E encryption algorithm support<sup>2</sup> Multiple E2E algorithm support<sup>2</sup>

#### DMO REPEATER SERVICES (LICENCE REQUIRED)

#### DMO voice repeated DMO tone signaling repeated Group status & SDS repeated

Type 1A efficient operation over one RF channel Presence signal support Emergency call monitoring & participation in calls

#### CONNECTIVITY

TETRA voice and data Bluetooth support for voice and data (PEI) PEI Data via RS232 and USB data cables Accessory connections via Rugged Accessory Connector (RAC) High speed interface for feature-rich audio accessories audio and data connection via facility connector MicroSD card slot (4GB max) Passive 125KHz RFID tag STProtect

#### ACCESSORIES

Personal charger Vehicle DC charger 1+1 desktop charger 6+6 desktop charger 12- and 24-way battery-only chargers Wide range of antennas Stud and belt attachments Rugged belt clip Rugged and soft leather cases Basic IP55 remote speaker microphone Advanced remote speaker microphone (with and without RF antenna) Hands-free kit Personal ear pieces Public order accessories Semi-covert accessories Feature-rich car kit Serial and USB data leads 4- & 8-way programming pods Basic car kit

1 – As defined in ETSI EN300 019-2-1 and EN300 019-2-2.

2 – Availability is subject to export licence.

- 3 The Man-Down Alarm should in no way be regarded as a substitute for compliance with appropriate risk assessment and other safety procedures and practices.
- To enable Man-Down a Software License is also required.
- 4 Operating at temperature extremes may limit some aspects of operational performance.
- 5 'Connector protector' must be enabled in customisation. An antenna, a battery and either an accessory or the STP9100 series RAC cover must be fitted.
- 6 Bluetooth and STProtect hardware options cannot both be fitted at the same time.
- 7 Through use of Sepura pseudo-keypad. Chinese text entry not supported.
- 8 Selectable from phonebook or incoming call list.

Sepura's policy is to continually improve its products and services. The features and facilities described in this document were correct at publication, but are subject to change without notice.





